

Plumbed-in Original

- Leaking



FOR SALES, FILTERS, SERVICE & REPAIRS

PH: 0401 441 291 
www.awesomewatermackay.com
info@awesomewatermackay.com



SERVICING MACKAY SINCE 2004



Remove 2x screws at the back to take the cover off




Check the feeder pipe going into the tank – see next page



Push back the clip
as displayed




Pull the pipe to
release

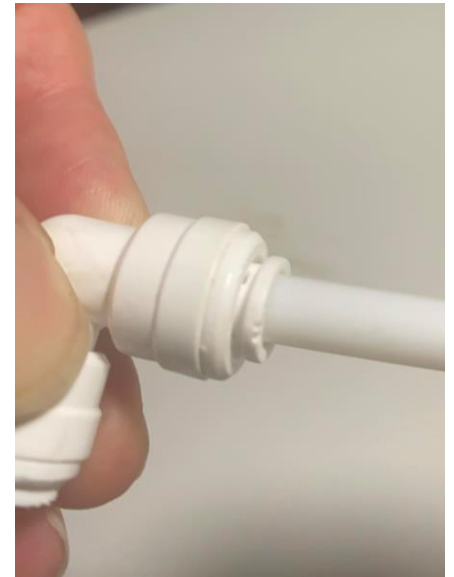

Push the pipe back
as far as possible,
and pull back on pipe
to make sure it is
locked in

Fitting the pipes securely

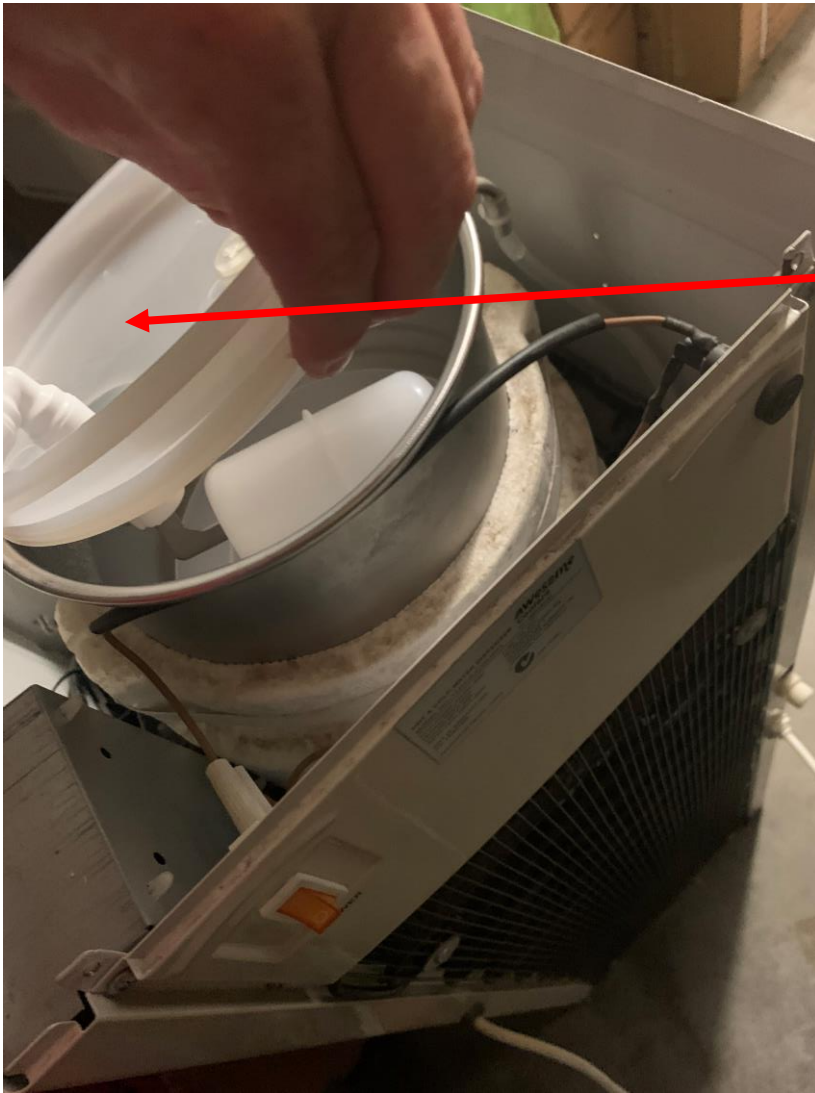

Remove the plug that sits in the tank by lifting it at one side, pulling upwards. Be careful as the edges of the tank is very sharp.



If the water is all the way to the top, drain some water by running the tap, until about half full.



Tap the float a few times to make sure it isn't stuck.



Clean plug and float by wiping it down with a clean chux, under some running water to remove any residue built up



When returning the plug, make sure the seal is in place. Push down slowly on all sides of the plug until it fits tightly into the tank.

Return plug & secure feeder pipe (page 4).
Turn water supply back on and check for any
leaks after about 10 minutes.

If leaking still persists, a technician will have to
inspect, float might need to be replaced.



Book Appointment